

Spring Plungers with ball and internal hexagon 22030.0244



Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.

Material

Body

- Stainless steel 1.4305

Ball


- Stainless steel, hardened

Spring

- stainless steel

Characteristic

Reinforced spring load: marked with two lines



Standard spring load



Heavy spring load

More information


Notes

Special types on request.
Spring plungers are specially tested for spring range and forces.

References

Thread lock on request, please refer to appendix - Technical Data - Calculation of indexing resistance, see details at the start of the section.

Drawing

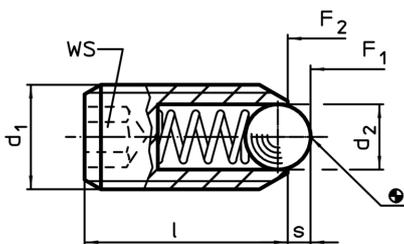

Order information

| Dimensions | | | WS | Stroke s | Spring load ¹⁾ | | max. [°C] | [g] | Art. No. |
|------------------------------------|----------------|----|------|-------------|---------------------------|---------------------|--------------|-----|------------|
| d ₁ | d ₂ | l | | | F ₁ ~ | F ₂ ~ | | | |
| [mm] | | | [mm] | [mm] | [N] | | | | |
| stainless steel, heavy spring load | | | | | | | | | |
| M4 | 2,5 | 12 | 0,8 | 2 | 12 | 18 | 250 | 0,8 | 22030.0244 |

¹⁾ statistical average value

Application example

